

Technical data sheet for

## **GAS TILTING BRATT PAN 1200mm**

G580-12, G580-12E

- 120L full stainless steel pan
- Manually operated tilting mechanism
- Optional electric power tilting mechanism
- Heavy-duty lid and hinge system
- Galvanized steel chassis
- Stainless steel exterior
- Easy clean
- Easy service
- Fully modular



G580-12

### **Overall Construction**

- Heavy-duty galvanized steel chassis
- Side panels 1.2mm stainless steel
- Splashback 1.2mm stainless steel
- Front panels 0.9mm stainless steel
- Enamelled pan front cover
- Full stainless steel pan with 2.0mm pan body
- 12mm thick stainless steel even heat pan base
- Large capacity pouring spout
- Heavy-duty spring balanced lid hinge system
- 1.5mm stainless steel lid suitable as bench-top workspace
- Full width stainless steel lid handle
- Manually operated pan lift handwheel with fold-away handle
- Electrically powered pan tilting option
- 63mm dia. heavy-duty stainless steel legs with adjustable feet

### **Controls**

- Large easy use control knobs - heat resistant reinforced
- Easy view control settings on knobs
- Single control for power and heating control
- Indicator lights for power and heating
- Quarter turn water valve control for ease of use
- Automatic pilot ignition and flame failure fitted
- 50-320°C electric thermostatic burner control
- Over temperature safety cut-out
- Fold away handle on manual pan tilt
- Pan up and down switches on electric pan tilt

### **Cleaning and Servicing**

- Seamless full stainless steel pan with rounded corners
- Easy clean stainless steel exterior panels
- Easy connection access via front service panels
- Service friendly lid hinge system
- Access to all parts from front of unit

# Technical data sheet for GAS TILTING BRATT PAN 1200mm

## Specifications

### Burners

Single 8 bar stainless steel burner 25kW

### Gas power (gross)

25kW, 85,300 Btu/hr

### Pan

Cooking surface 1080mm x 450mm, 4860cm<sup>2</sup>  
215mm deep

### Gas connection

R <sup>3</sup>/<sub>4</sub> (BSP) male

All units supplied with Natural and LP gas  
regulator

### Water connection

Cold water connection

<sup>1</sup>/<sub>2</sub>" tube connection via 15mm crox fitting  
550kPa, 80psi max water pressure

### Electrical connection

220-240Vac, 50/60Hz, 1A, 1P+N+E

3 pin 13A plug cordset fitted

### Dimensions

Width 1200mm

Depth 812mm

Height 915mm

Incl. splashback 1085mm

With lid open 1566mm

### Nett weight

205kg

### Packing data

1.36m<sup>3</sup>, 286kg

Width 1245mm

Depth 870mm

Height 1255mm

### Gas types

Available in Natural gas and LP gas, please specify

when ordering


Units supplied complete with gas type

conversion kits


### Options

Joining caps



G580-12



G580-12E



G580-12, G580-12E

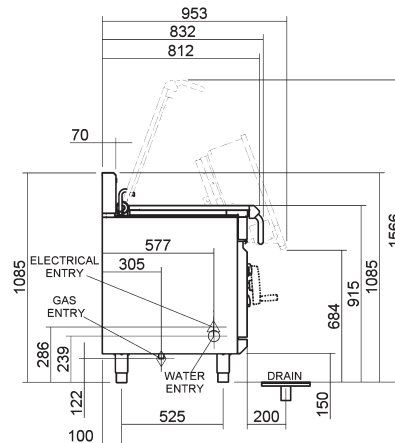

[www.blue-seal.co.uk](http://www.blue-seal.co.uk)  
[www.bluesealevolution.com](http://www.bluesealevolution.com)

## United Kingdom

### Blue Seal Limited

Unit 67

Gravelly Business Park

Gravelly

Birmingham B24 8TQ

England

Telephone 0121-327 5575

Facsimile 0121-327 9711

Email [sales@blue-seal.co.uk](mailto:sales@blue-seal.co.uk)

[www.blue-seal.co.uk](http://www.blue-seal.co.uk)

## Australia

### Moffat Pty Limited

740 Springvale Rd

Mulgrave

Victoria 3170

Australia

Telephone 03-9518 3888

Facsimile 03-9518 3833

Email [vsales@moffat.com.au](mailto:vsales@moffat.com.au)

[www.moffat.com.au](http://www.moffat.com.au)

## New Zealand

### Moffat Limited

16 Osborne St

PO Box 10-001

Christchurch 8011

New Zealand

Telephone 03-389 1007

Facsimile 03-389 1276

Email [sales@moffat.co.nz](mailto:sales@moffat.co.nz)

[www.moffat.co.nz](http://www.moffat.co.nz)



ISO9001

Quality  
Management  
Standard

Designed and manufactured by

**MOFFAT**

ISO9001

All Blue Seal products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.



In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.