



CHIEFTAIN

G1848X Twin Pan Fryer

Key features

- Two independently controlled pans
 - Energy efficient as only use one pan during quieter periods
- Accurate temperature control and recovery
 - Efficient high yield performance
- All stainless steel constructions
 - Robust construction to withstand busy demands
- Temperature range between 140 - 190°C
 - Variable, precise control
- Piezo ignition
 - Simple, trouble-free operation
- Fast-acting safety thermostat
 - Power cut to unit if oil overheats
- Supplied with fish grids, baskets and lid
 - Everything you need to start frying




Accessories

- Side Screens
- Hob capper (joins two units)
- Factory fitted, adjustable castors

Similar Models

- G1838X twin basket fryer
- G3865 twin pan fryer
- G421 twin pan fryer
- E1848 twin pan fryer



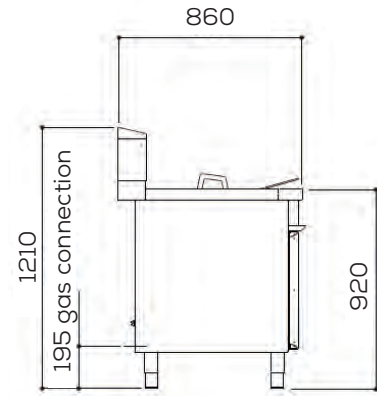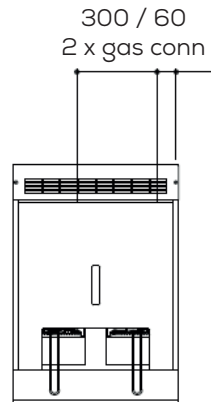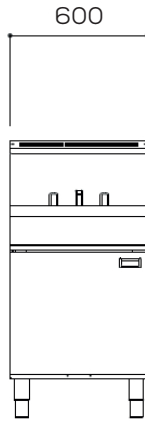

Measurements *in mm*

Unit on castors is same height

Specification *details*

Total rating (natural and propane - kW - Nett)	33.4		
Total rating (natural and propane - btu/hr - gross)	125,400		
Inlet size (natural and propane)	1/2" BSP*		
Flow rate - natural (m ³ /hr)	1.75 x 2		
Flow rate - propane (kg/hr)	1.23 x 2		
Inlet pressure (natural and propane - mbar)	20 / 37		
Operating pressure (natural and propane - mbar)	13 / 37		
Oil capacity (litres)	15 x 2		
Hourly chip output (kg)	36 x 2		
Weight (kg)	116		
Packed weight (kg)	126		
Packed dimensions (w x d x h - mm)	650 x 1000 x 1300		
GTIN numbers			
Nat Gas (feet)	Nat Gas (castors)	LPG (feet)	LPG (castors)

* terminating in 3/4" BSP manifold)

Installation notes

Adequate ventilation must be provided to supply sufficient fresh air for combustion and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit, draught free position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.

A clearance of 150mm between appliance and any combustible wall and a minimum vertical clearance of 1220mm above the top edge of flue should be observed.

