



## P0630 - Lincat Electric Counter-top Pizza Oven - Single-Deck - W 1286 mm - 7.2 kW

Transport yourself to the Centro Storico district of Naples with the authentic taste of the pizzas from the Lincat Electric Pizza Oven.

- ✓ Ideal for restaurants, pizzerias, takeaways, fast food outlets, canteens and leisure establishments
- ✓ Perfect for deep pan, thin crust, fresh dough, part baked or frozen pizzas, as well as a variety of other foods such as ciabatta, naan, garlic bread, lasagna, jacket potatoes, pies, pasties and pastries
- ✓ Firebrick base for crisp, even cooking of pizza bases and a maximum temperature of 480°C
- ✓ Internal illumination for better visibility of product and enhanced appearance in front of house applications
- ✓ Independently controlled top and base of oven compartment
- ✓ Thermostatic control and temperature display gauge to monitor oven temperature more accurately
- ✓ Double-glazed door construction for energy efficiency with toughened glass for safety
- ✓ 20 minute audible timer

### Specifications

#### Summary Power and Performance

<b>Brand</b>	Lincat	<b>Total Power kW</b>	7.2
<b>Range</b>	Specialist	<b>Temperature Range °C</b>	80-480
<b>Power Type</b>	Electric	<b>IP Rating</b>	IP23
<b>Unit Type</b>	Counter-top	<b>Temperature Control</b>	Mechanical
<b>Available in UK Only</b>	No	<b>Oven Rating kW</b>	7.2
<b>UK Warranty</b>	2 Years Parts and Labour Warranty		
<b>Export Warranty</b>	Contact your local dealer		
<b>GTIN</b>	5056105103721		

#### Key Specifications Capacity

<b>Number of Decks</b>	1	<b>Pizza Capacity</b>	60 x 12" [30cm] thin crust pizzas [chilled]
------------------------	---	-----------------------	---

#### Weights and Dimensions Supply Connections

<b>Unit Height (External) mm</b>	365	<b>Requires Installation</b>	Yes
<b>Unit Width (External) mm</b>	1286	<b>Requires Electrical Supply</b>	Yes
<b>Unit Depth (External) mm</b>	925	<b>UK 3 Pin Plug</b>	No
<b>Height (Internal) mm</b>	160	<b>Requires Hardwiring</b>	Yes
<b>Width (Internal) mm</b>	950	<b>Electrical Supply Rating Watts</b>	7,200
<b>Depth (Internal) mm</b>	640	<b>Single Phase Amps</b>	31.3
<b>Net Weight Kg</b>	129.5	<b>Single Phase Voltage</b>	230
		<b>Three Phase Amps</b>	L1=10.4; L2=10.4; L3=10.4
		<b>Three Phase Voltage</b>	400

#### Shipping

<b>Packed Weight Kg</b>	133.5
<b>Packed Height cm</b>	58
<b>Packed Width cm</b>	139
<b>Packed Depth cm</b>	111

### Available Accessories

PO630/FS




Floor Stand for P0630

Available Accessories

P0630/SK

Stacking Kit for P0630

Technical Picture

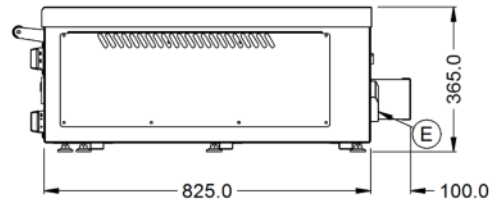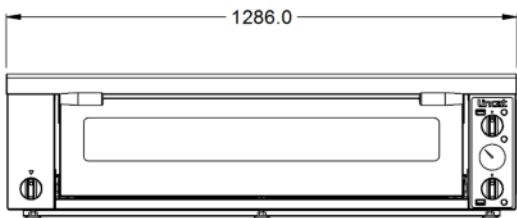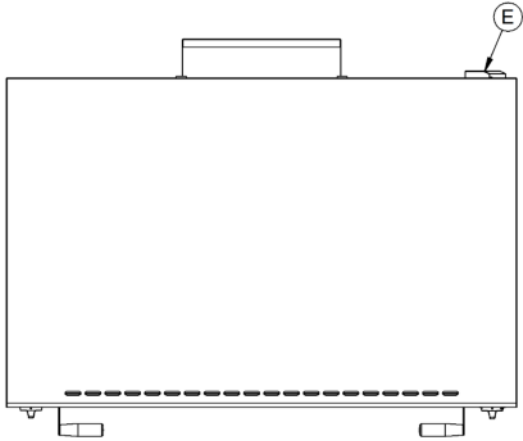



**Lincat Limited**

Whisby Road,  
Lincoln, LN6 3QZ,  
United Kingdom

**Company No:** 2175448

A member company of



**Customer Care**

**Tel:** +44 1522 875500  
**Email:** [care@lincat.co.uk](mailto:care@lincat.co.uk)

**Export Customers**

**Tel:** +44 1522 503250  
**Email:** [export@lincat.co.uk](mailto:export@lincat.co.uk)

**Opening Hours**

**Monday – Friday:**  
8.30am – 5pm