



G3101/G3161 OPEN TOP GAS OVEN RANGES



G3101 Six Burner Range

MODELS and ACCESSORIES

G3101 Six burner range - general purpose oven

G3161 Four burner range - general purpose oven

- Fully integrated extended flue
- Splashplate and plateshelf (*not for use with extended flue*)
- Oven shelf
- Lift-off fryplate
- Factory fitted, adjustable castors
- Fixed installation kit
- Suiting kit

KEY FEATURES

- Energy efficient, high performance 5.3kW burners
 - *Quick heat up, reduced waiting time*
- Semi-sealed, pressed stainless steel hob
 - *Easy to remove and keep clean*
- Individual cast iron pan supports
 - *Long-lasting and robust*
- Vitreous enamelled oven chamber
 - *Easy to clean and to keep clean*
- Wide oven temperature range of 120 - 270°C
 - *Ideal to prepare a wide variety of food*
- Piezo ignition to oven
 - *Simple, trouble-free operation*
- 900mm unit has twin doors with individual catches
 - *Retains heat within the oven chamber*
- Oven has 5 shelf positions and allows 2 shelf cooking
 - *Versatile, ideal for a wide range of menu items*
- Low profile door handles
 - *Reduces intrusion into work space*
- Laser-etched control icons
 - *Permanent, indelible markings*

INSTALLATION NOTES

Adequate ventilation must be provided to supply sufficient fresh air for combustion and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit, draught free position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.

A clearance of 150mm should be observed between appliance and any combustible wall.






DOMINATOR PLUS

G3101/G3161 OPEN TOP GAS OVEN RANGES

MODEL DIMENSIONS (in mm)

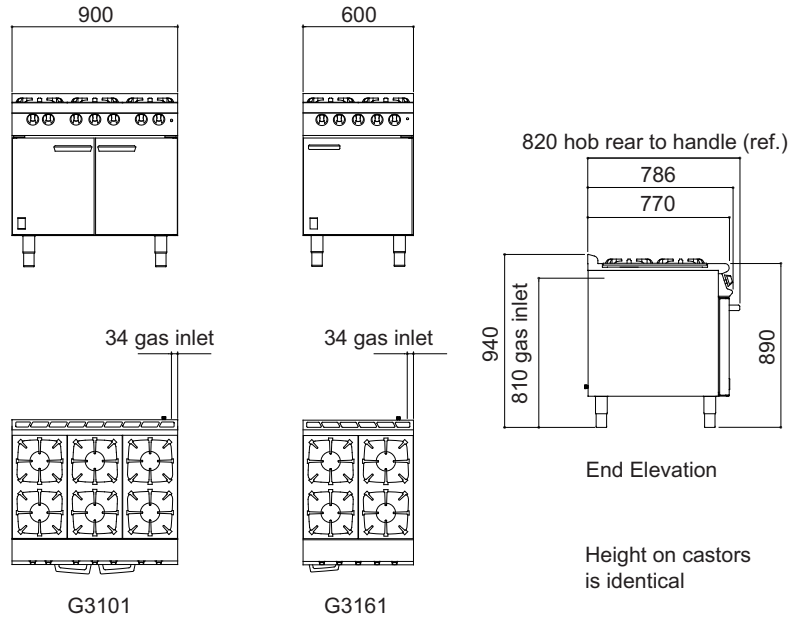

SPECIFICATION DETAILS

	G3101	G3161
Total rating (natural and propane - kW - Nett)	38.9	26
Total rating (natural and propane - btu/hr - gross)	146,000	97,600
Inlet size (natural and propane)	3/4" BSP	3/4" BSP
Flow rate - natural (m ³ /hr)	4.10	2.70
Flow rate - propane (kg/hr)	2.90	1.90
Inlet pressure (natural and propane - mbar)	20 / 37	20 / 37
Operating pressure (natural and propane - mbar)	15 / 37	15 / 37
Hob burner rating * (natural and propane - kW)	5.3 x 6	5.3 x 4
Hob burner rating * (natural and propane - btu/hr)	19,900 x 6	19,900 x 4
Oven burner rating * (natural and propane - kW)	7.1	4.8
Oven burner rating * (natural and propane - btu/hr)	26,600	18,000
Oven dimensions (w x d x h - mm)	700 x 535 x 430	400 x 535 x 430
Oven shelf (w x d - mm)	700 x 535	400 x 535
Gastronorm compatibility	2/1	1/1
Weight (kg)	114	88
Packed weight (kg)	122	94