

# NE-1027/ NE-1037

## MEDIUM DUTY

# Panasonic

### NE-1027 MANUAL

- NE-1027 (1000W)
- Fully variable power levels from 100W – 1000W
- Timer dial control
- Power dial control
- Stainless steel cavity and casing

### NE-1037 TOUCH

- NE-1037 (1000W)
- 3 power levels
- 10 programmable memory pads
- 2 and 3 stage heating – allows power level to change automatically during cooking
- Double quantity (x2) function
- Program lock – allows one touch operation of the program pads
- Self diagnostic
- Beep tone option
- Cycle counter – records the number of operations
- Stainless steel cavity and casing

### PLACEMENT OF YOUR OVEN

- Oven must be placed on a flat, stable surface. For proper operation, the oven must have sufficient air flow.  
A gap of at least 5cm (2") must be available at the right and left hand sides and back wall of the oven.  
A minimum space of 20cm (8") must be left above the oven and the 2 exhaust vents at the rear.
- Do not place the oven on a shelf directly above or beside a gas or electric hob or cooker. This may cause damage to the oven.  
It is dangerous to position this oven on a shelf which is so high that food and accessories cannot be safely removed by the user.
- Do NOT attempt to stack these ovens.


### Power Supply

- NE-1027 13 amp, NE-1037 13 amp

### TECHNICAL SPECIFICATIONS

	MANUAL	TOUCH
Model	NE-1027	NE-1037
Power Source	230-240V / 50Hz, Single phase	
Power Requirement	1490W, 6.6amp	
Output Power (W) IEC 705*		
High	1000W	1000W
Medium	500W	500W
Simmer	100W	–
Defrost	340W	340W
Stand	Zero W	Zero W
Frequency MHz	2450MHz	2450MHz
Outer Dimensions (wxdxh)	510 x 360 x 306mm	
Oven Dimensions (wxdxh)	330 x 330 x 200mm	
Weight (kg)	17.8kg	17.8kg
Timer (min)	30 min	99 min, 99 sec
Programs	–	10
Memory	–	3 stage
Cubic Capacity	22 litres (0.78 cu. ft)	

\* IEC 705 – 88 Test Procedure Specifications subject to change without notice

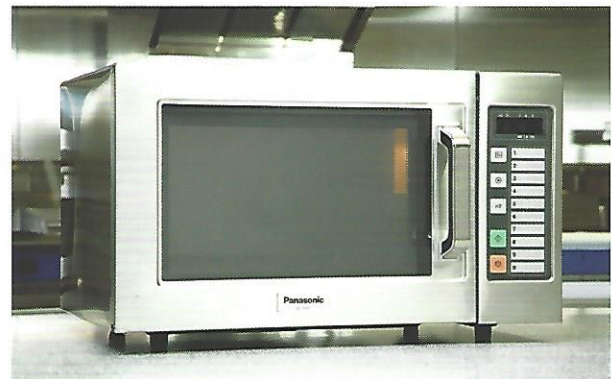

NE-1027 Manual