

#### **DOMINATORPLUS**

## G3122 Two Burner Boiling Top

#### Key features

- Energy efficient, high performance 5.3kW burners
  - Quick heat up, reduced waiting time
- Semi-sealed, pressed stainless steel hob
  - Easy to remove and keep clean
- Single cast iron pan support
  - Long-lasting and robust
- · Mounted upon open stand
  - Under shelf provides useful storage space
- Laser-etched control icons
  - Permanent, indelible markings

#### Accessories

- Fully integrated extended flue
- Fixed stand
- Factory fitted, adjustable castors
- Fixed installation kit


#### Similar Models

- G9042 Two burner boiling top
- G3124 Four burner boiling top
- E3122 Two hotplate boiling top
- E3902i Two zone induction boiling top





# Two Burner Gas Boiling Top

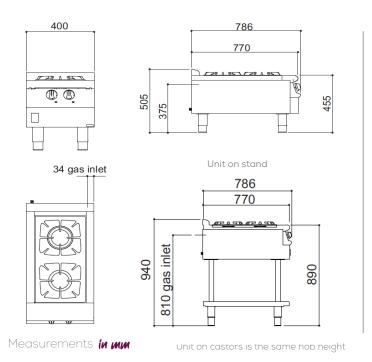

#### Installation notes

Adequate ventilation must be provided to supply sufficient fresh air for combustion and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit, draught free position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.

A clearance of 150mm should be observed between appliance and any combustible wall.

### Specification details

Total rating (natural and propane - kW - Nett)	10.6	
Total rating (natural and propane - btu/hr - gross)	39,800	
Inlet size (natural and propane)	3/4" BSP	
Flow rate - natural (m³/hr)	0.82	
Flow rate - propane (kg/hr)	1.11	
Inlet pressure (natural and propane - mbar)	20 / 37	
Operating pressure (natural and propane - mbar)	15 / 37	
Hob burner rating * (natural and propane - kW)	5.3 x 2	
Hob burner rating * (natural and propane - btu/hr)	19,900 x 2	
Weight (kg)	28.5	
Packed weight (kg)	34	
Packed dimensions (w x d x h - mm)	400 x 1000 x 500	
GTIN numbers	Nat Gas	LPG